


SQ8800S/D

Flap Barrier Turnstile

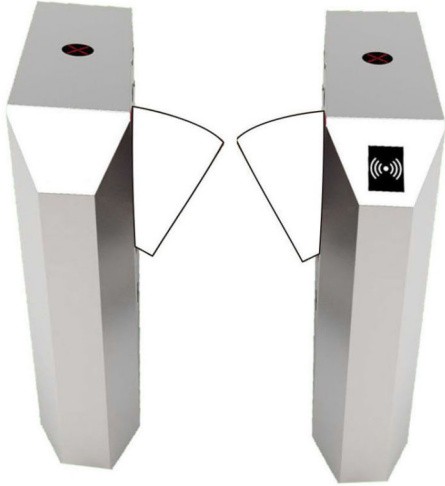

Built-in Reader Integration

- SQ8800S/D series ships already integrated with our customer's preference for either card or fingerprint access control reader. This greatly reduces installation time & expense.
- SQ8800S/D series and associated access control readers are all factory-tested prior to shipping.

Features

Reliability

- SQ8800S/D stainless steel casework ensure long-lasting durability
- High quality electrical components

Safety

- Barrier retract automatically during emergencies
- Barrier retract automatically during power outage with battery installed
- All smooth finish. No Exposed screws
- Ergonomic design makes card and fingerprint authentication fast & simple for user

- SmartQ provides true plug & play turnstile with the lowest possible total cost of ownership in the industry.
- Simplification
- LCD on the flap barrier control board, easy operation.

The SQ8800S/D is single / double lane flap barrier turnstile series designed for smooth and silent operation and draws very little power. It's made of stainless steel which makes SQ8800S/D highly durable

SQ8800S/D barriers are normally held in a locked position, thus denying access to the secured side. Upon SQ8800S/D reader (RFID and/or fingerprint) positively recognizing a user's valid access card or fingerprint, its barriers retract upward automatically, thus allowing users passage to the secured side.

During emergencies the barriers automatically retract upward, thereby ensuring users FAST unencumbered exit to safety. A battery for Power outage safety can be installed for retracting the barrier automatically

SQ8800S/D provides both security and convenient space, all in a very durable and elegant compact design.

SQ8800S/D

Spesification

Power Requirements	AC 100~120V/200~240V,50/60Hz
Working Temperature	-28°C ~60°C
Working Humidity	5%~80%
Working Environment	Indoor/ Outdoor (if sheltered)
Speed of throughput	Maximum 35/ minute
Lane width(mm)	600
Footprint(mm*mm)	1200*1150
Dimention(mm)	L=1150,W=300,H=1000
Dimention with packing(mm)	L=1480,W=420,H=1110
Net Weight(kg)	119
Weight with packing(kg)	157
LED indicator	Y
Cabinet Material	SUS304 Stainless Steel
Lid Material	SUS304 Stainless Steel
Barrier Material	Acrylic
Barrier Movement	Retracting
Emergency Mode	Y
Security Level	Medium

Dimention (mm)

